


# 700 SERIES

- Size range: 2" to 16"  
Consult factory for larger sizes
- Temperature range (-)60°F to +250°F  
Consult factory for higher temperatures
- Conforms to all applicable standards  
API 609, DIN 3202, ISO 5752, BS EN593  
and FDA 21CFR177.2600
- ANSI B16.5 CLASS 150 Flange drilling  
Other drillings available

## Resilient Seated - Composite Body

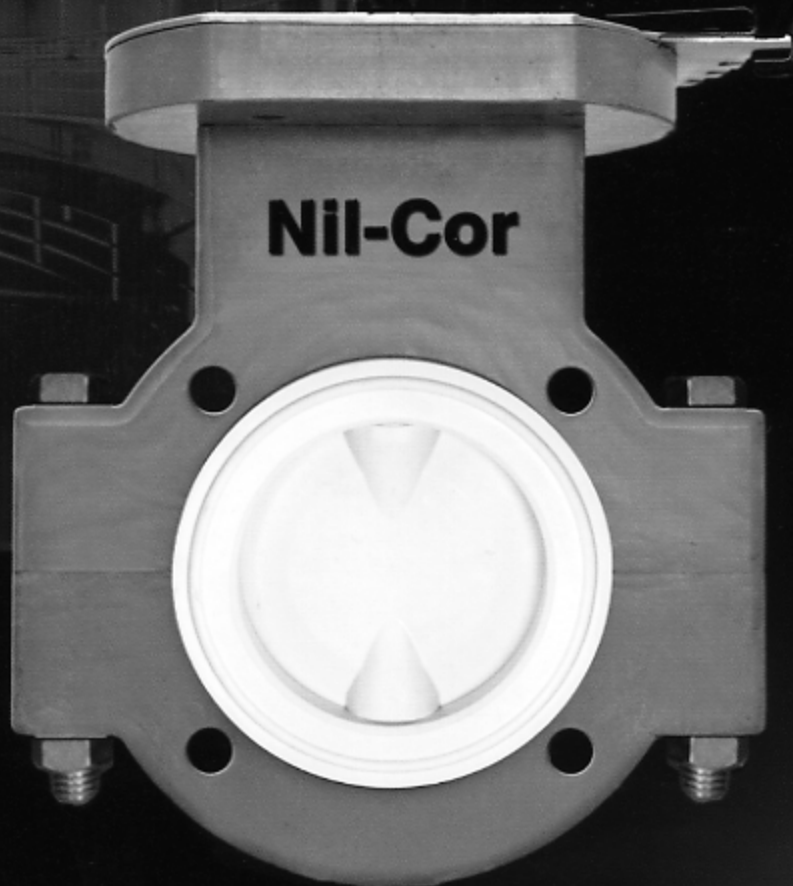


**Nil-Cor**

# 700 SERIES

## Features

Resilient Seated - Composite Body

Strong  
Light Weight  
Zero Corrosion

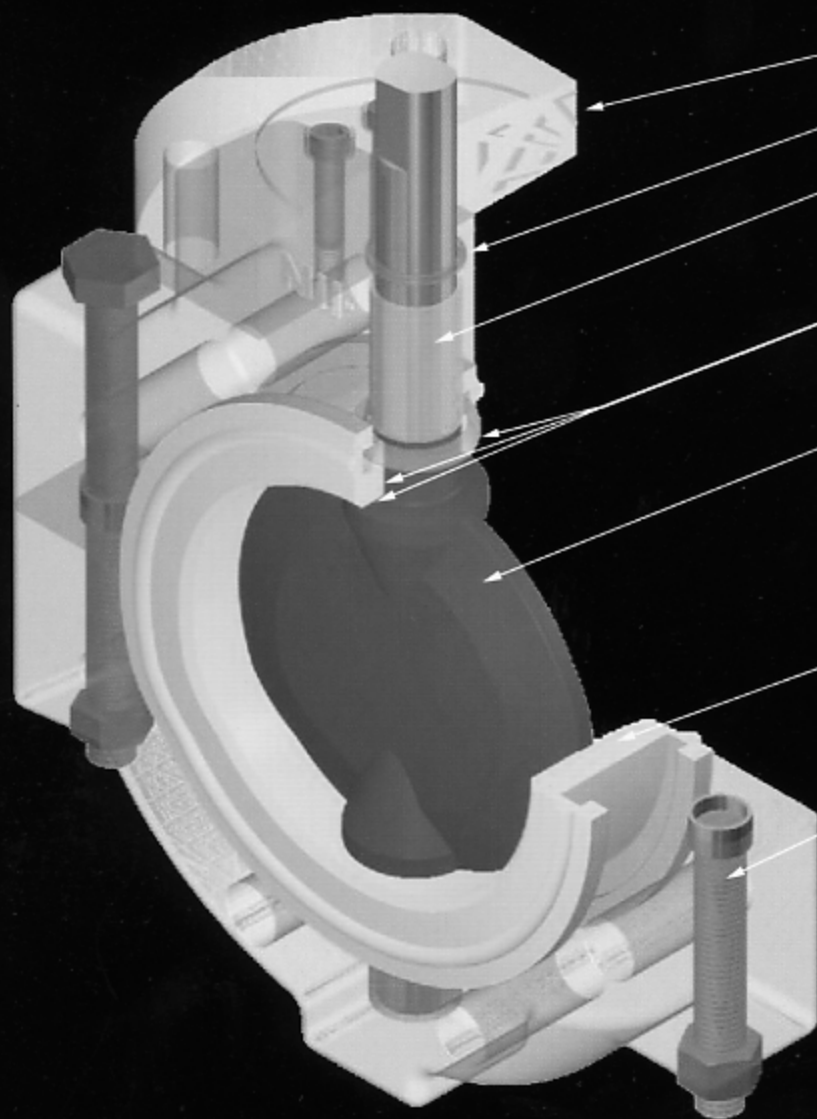

ISO 5211 mounting flange

Atmospheric stem seal

PTFE composite bearing  
top & bottom never needs  
lubrication

Energized Triple stem seals  
top & bottom for leak free  
service

Disc & stem are one piece casting  
available in stainless steel or  
food grade EPDM or Hypalon  
encapsulated nickel plated DCI  
with double "D" shaft drive.  
Other disc materials available

Seat is thick food grade EPDM  
meeting FDA 21CFR177.2600  
or Hypalon elastomer locked into  
valve body

Zinc Dichromate plated B7 fasteners

Valve body is manufactured from  
advanced fiber reinforced vinyl ester  
resin that is as strong as steel, 1/2 the  
weight of ductile iron and will never  
corrode. Guaranteed!

Body configurations include  
flange wafer or lug style



## Nil-Cor, LLC

12241 Rockhill Ave. N.E.  
Alliance, OH, 44601  
330-823-0500 - Fax (330) 821-6722  
[www.nilcor.com](http://www.nilcor.com)